

REFLECTED CEILING PLAN

NOTE:
ALL WORK TO BE DONE IN ACCORDANCE WITH
THE NATIONAL ELECTRICAL CODE AND THE N.E.C.


ELECTRICAL NOTES:

1. All conduits to have a minimum of 2 #12 THHN wires (UL Standard #52), and shall be minimum of 3/4" unless otherwise noted.
2. All electrical floor outlet enclosures shall be set flush on the concrete or vinyl floor.
3. The contractor shall install in all other ceiling, one (1) "Palusel Package" (one stop) on each side of the recessed baffle.
4. All device plates for wall outlets shall be brush satin finish, anodized aluminum. Device plate for telephone outlets shall contain a bushed hole.
5. Power interruptions and core drilling will be permitted, only between the hours of 8:00 PM and 5:00 AM.
6. Contractor will not be permitted to chase the floor.
7. When installing receptacle outlets, splices and/or connections in the underfloor system shall be made in the header duct only. Contractor shall install one from each receptacle to the header duct. All unused wiring to be removed by the contractor.
8. Circuits that are designated with numbers 1-6 inclusive and 31 and above are not existing in the header duct. Contractor is to install and connect the appropriate quantity of wires, from them to be connected, back to the designated panel on the floor cell and header duct.
9. When installing any special response outlets, that are shown connected to circuits other than circuits 7-30 inclusive, the wires shall be installed by the contractor in the header duct and connected to the panel. The contractor shall modify the panel directory to reflect the circuit availability.
10. Minimum distance for all combination telephone /duplex receptacles an/or receptacles shall be 6" from walls or connectors, unless otherwise indicated on drawings.

11- FEE MATERIALS (ELECTRICAL) FURNISHED BY THE B2T AUTHORITY
SEE DRAWING 6 A-2



KEY PLAN

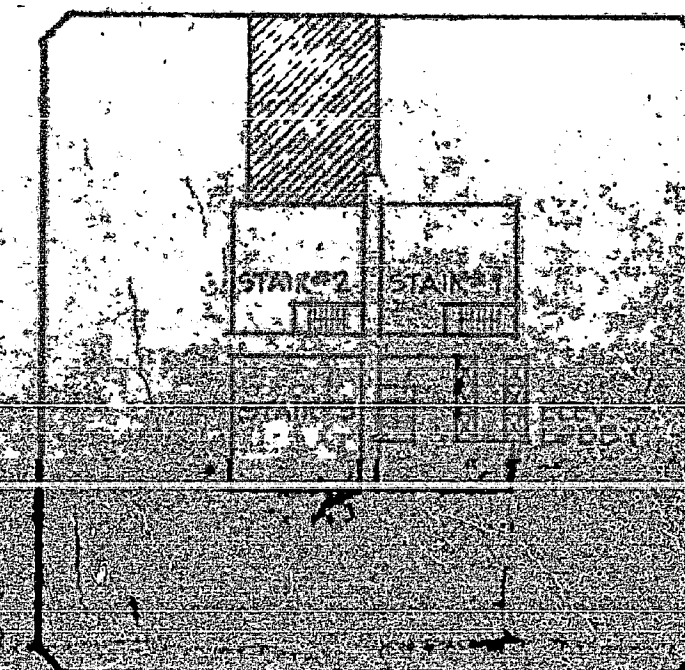

<input type="checkbox"/>	STANDARD
<input type="checkbox"/>	STANDARD
<input checked="" type="checkbox"/>	PROTECTION
<input type="checkbox"/>	PICTURE - SEE P. 1

RELEASED FOR BIDDING
BY *J. Di Santo* DATE 1-15-80

RELEASED FOR CONSTRUCTION
BY *J. Di Santo* DATE 2/2/80
MANAGER, WTC PLANNING DIVISION

no.	date	REVISIONS
1-11-80		ADDED PROTECTION BOXES OVER LIGHT FIXTURES.
12-18-79		GENERAL REV. AS PER "PORT AUTHORITY" ENG. COMMENTS DATED 12-5-79.
10-11-79		GENERAL REV. AS PER "PORT AUTHORITY" ENG. COMMENTS DATED 9-20-79.

ZANUSSI CORP. of AMERICA
ONE WORLD TRADE CENTER

REFLECTED OLD PLAN

DI SANTO ASSOCIATES
ARCHITECTS - INTERIORS
FACILITIES AND OFFICE PLANNING

NO CENTRAL MADE IN N.Y. 10001

DATE 1-1-80 BY *J. Di Santo* 101-20
SCALE 1/8" = 1'-0"